
SQUARE DRIVE HYDRAULIC TORQUE WRENCH







Brand:	Torqueing Power Solutions (TPS)
Series:	TS (Torque Wrench Square Drive)
Material:	Aluminum Titanium Alloy (7075) & High Strength Alloy Steel
Accuracy:	+/- 3%
Max Pressure:	700 bar / 10,000 PSI
Advantages:	360° x 180° uni-swivel hose coupling
	Anti-Reverse Drive Pawl
	Easy to handle
	Powerful, Accurate, Dependable, Durable

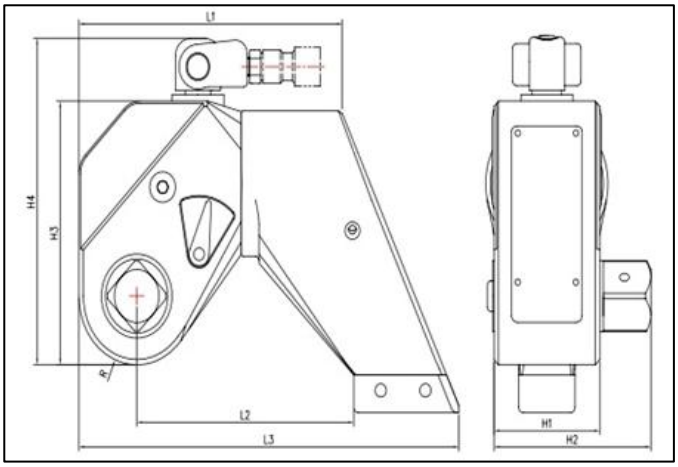

TS-Series	TS-1	TS-3	TS-5	TS-8	TS-10	TS-15	TS-20	TS-25	TS-35	TS-50
Torque Min (Ft.lb)	119	315	540	738	1097	1416	1821	2407	3448	5036
Torque Max (Ft.lb)	1280	3148	5397	7586	10985	14137	19230	25184	34484	50361
Torque Min (Nm)	161	427	732	1001	1487	1920	2469	3263	4675	6828
Torque Max (Nm)	1735	4268	7317	10285	14894	19167	26072	34145	46754	68280
Square Drive (in)	¾”	1”	1.1/2”	1.1/2”	1.1/2”	2.1/2”	2.1/2”	2.1/2”	2.1/2”	2.1/2”
L1 (mm)	130	170	202	228	237	273	287	323	351	376
L2 (mm)	102	140	160	184	192	223	248	256	271	295
L3 (mm)	182	249	286	326	336	391	433	464	494	528
H1 (mm)	52	70	81	90	100	110	120	138	153	162
H2 (mm)	77	98	125	134	144	164	187	206	217	226
H3 (mm)	96	127	149	172	181	206	221	258	279	291
H4 (mm)	133	165	184	207	216	241	256	231	315	326
R (mm)	25.8	34.8	39.8	46.8	50.8	56.8	59.8	70.8	76.8	78.8
Weight (kg)	2	4	7	10.6	12.9	20	25	33.8	43	52