
## SLIM HEX DRIVE TORQUE WRENCH





| | |
|---|---|
| **Brand:** | Torqueing Power Solutions (TPS) |
| **Series:** | TST (Slim Hex Drive) |
| **Material:** | Aluminum-Titanium Alloy (7075) & High Strength Alloy Steel |
| **Accuracy:** | +/- 3% |
| **Max Pressure:** | 700 bar / 10,000 PSI |
| **Advantages:** | 360° x 180° uni-swivel hose coupling |
| | Quick change ratchet link |
| | Anti-reverse Drive Pawl |
| | Powerful, Accurate, Dependable, Durable |

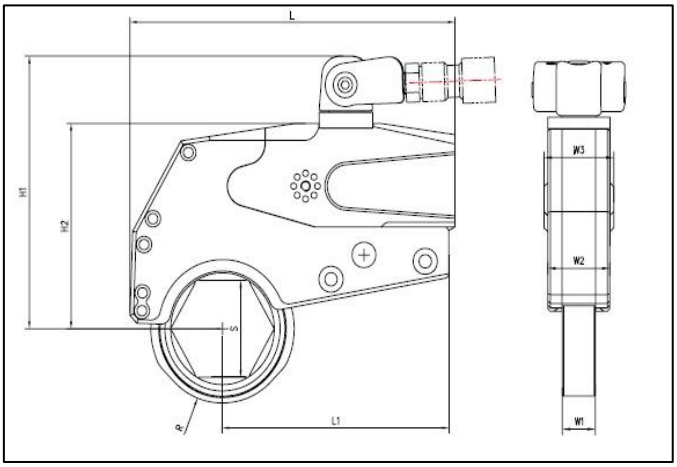


| TST-Series | TST-2 | TST-2 | TST-4 | TST-4 | TST-9 |
|---|---|---|---|---|---|
| **Nut Range (mm)** | 27 – 46 | 50 – 60 | 27 - 65 | 70 – 80 | 70 – 90 |
| **Nut Range (inch)** | 1.1/16” - 1.13/16” | 2” – 2.3/8” | 1.5/8” – 2.9/16” | 2.3/4” – 3.1/8” | 2.3/4” – 3.1/2” |
| **Torque Min (Ft.lb)** | 129 | 158 | 362 | 396 | 816 |
| **Torque Max (Ft.lb)** | 1450 | 1643 | 4056 | 4260 | 9373 |
| **Torque Min (Nm)** | 175 | 215 | 491 | 538 | 1106 |
| **Torque Max (Nm)** | 1966 | 2228 | 5500 | 5777 | 12700 |
| **R (mm)** | 23.75 – 34.75 | 37.5 – 43 | 34.29 – 49.1 | 51.82 – 57.66 | 58.36 – 61.41 |
| **L (mm)** | 158 – 161.5 | 163.3 – 167.7 | 217 – 221.5 | 223.3 – 227.8 | 296.59 -298.12 |
| **L1 (mm)** | 115 | 115 | 152.4 | 152.4 | 216.5 |
| **H1 (mm)** | 138 | 146 | 170 | 181 | 211.92 |
| **H2 (mm)** | 92.7 | 100.66 | 128 | 139 | 169.62 |
| **W1 (mm)** | 19 | 19 | 22.23 | 22.23 | 29.62 |
| **W2 (mm)** | 32 | 32 | 41.91 | 41.91 | 55.53 |
| **W3 (mm)** | 35.6 | 35.6 | 46.99 | 46.99 | 62.3 |
| **Cylinder Weight (kg)** | 1.9 | 1.9 | 2.9 | 2.9 | 6.6 |
| **Link Weight (kg)** | 1 | 1.1 | 2.8 | 2.9 | 7.1 |