
SMART SOCKET

- Measures and displays peak torque up to 18,000 ft. lbs. (24,404 Nm)
- NEW 18K Smart Socket™ must be used with a deep reaction arm
- Build-in rechargeable battery
- "Pass" or "Fail" indication function
- Data logging – download logs (XLS, CSV, PDF)
- Free software included
- Full traceability of bolted joints
- Optional: Tablet



Brand:	Torqueing Power Solutions (TPS)
Series:	S – Series (Smart Socket)
Advantages:	Real time monitoring
	Preset target torque.
	Real peak torque pass or fail indication
	Data recording system

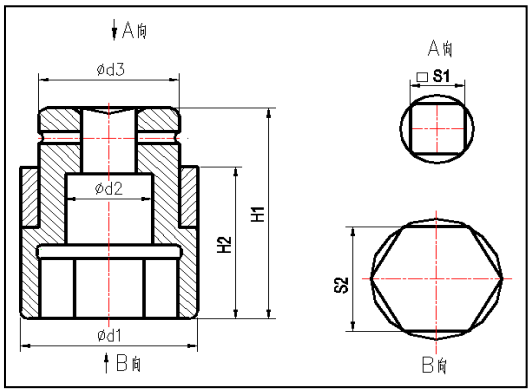

Model	Bolt Size mm	Max. Torque (NM)	S1 (Sq. Dr.)	S2 (Hex) mm	H1	H2	d1	d2	d3
					mm				
S-24	M24	1200	3/4"	36	83	65	52	26	42
S-36	M36	3000	1"	55	92	72	84	37	52
S-39	M39	3600	1.1/2"	60	108	83	90	42	86
S-42	M42	4600	1.1/2"	65	114	74	99	46	86
S-45	M45	5400	1.1/2"	70	118	88	108	47	86
S-48	M48	6600	1.1/2"	75	120	90	118	49	88
S-52	M52	8300	1.1/2"	80	124	99	124	53	90
S-56	M56	10200	1.1/2"	85	126	100	131	57	90
S-64	M64	12000	1.1/2"	95	132	105	146	65	94