
SMART SOCKET

- **Real time monitoring, measures and display peak torque**
- **Preset target torque, real peak torque Pass or Fail indication**
- **Data recording system, download or transfer by Wireless/Bluetooth**
- **Wide range torque measurement**
- **New update App software and Industrial touch screen optional**
- **C-Series Smart Socket is connectivity with all -Series which is Bluetooth and Wireless compatible and it's for transducer verified joint calibration (optional)**
- **Simple new technology re-calibration system makes smart socket can fit any transducer fixture (dynamic or static) for calibration purpose**



Brand:	Torqueing Power Solutions (TPS)
Series:	C – Series (Smart Socket)
Advantages:	Real time monitoring
	Preset target torque.
	Real peak torque pass or fail indication
	Data recording system

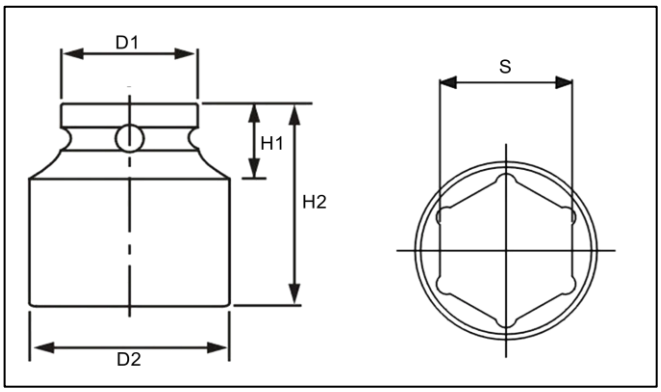

Model	Hex S (mm)	Min Torque (N.m)	Max Torque (N.m)	S	D1	D2	H1	H2	Weight
					mm				(Kg)
C-33	33	200	2000	3/4 "	42	72	30	100	1.3
C-36	36	200	2000	1 "	54	72	35	100	1.3
C-41	41	200	2000	1 "	54	72	22	90	1.3
C-46	46	200	2000	1 "	54	72	22	90	1.3
C-50	50	400	4000	1 "	54	86	20	90	1.5
C-55	55	400	4000	1 "	54	86	20	90	1.5
C-60	60	400	4000	1 "	54	86	20	90	1.5
C-65	65	1000	10000	1-1/2 "	87	115	30	120	4.1
C-70	70	1000	10000	1-1/2 "	87	115	30	120	4.1
C-80	80	1000	10000	1-1/2 "	87	115	30	120	4.1
C-90	90	1600	16000	1-1/2 "	100	115	30	130	5.6
C-100	100	1600	16000	1-1/2 "	100	115	45	145	7.1