
ELECTRIC TORQUE WRENCH



- Electric torque wrench Integrated servo motor
- The above parameters are subject to change. The actual conditions prevail. The weight does not include the weight of the reaction arm.
- Programmable preset torque value with torque and angle control
- Accuracy ± 3%
- Integrated AC servo motor with power box (200x120x75mm) and 5m cable

Brand:	Torqueing Power Solutions (TPS)
Series:	STW (Servo Torque Wrench)
Power Input	220 / 230V, 1 PH, 50/60 Hz
Accuracy:	+ / - 3 %
Advantages:	Ergonomically designed handle
	High Precision Japanese Servo Motor
	Lower Noise, Faster Speed
	Real time display of torque

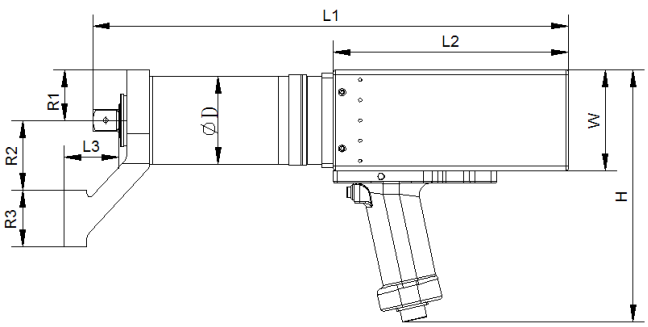

Model	min torque (NM)	max torque (NM)	S	D	L1	L2	L3	H	W	R1	R2	R3	Weight	speed
					mm								(Kg)	rpm
STW-05S	100	500	3/4 "	65	400	217	46	223	89	34	56	43	6.8	19
STW-10S	100	1000	3/4 "	78	405	217	48	223	89	34	62	50	7.5	8.4
STW-16S	200	1600	1 "	78	447	217	60	223	89	36	70	58	8.4	5.6
STW-20S	400	2000	1 "	78	447	217	60	223	89	36	70	58	8.4	4.5
STW-30S	500	3000	1 "	88	448	217	80	223	89	46	80	70	10.2	3.2
STW-40S	700	4000	1-1/2 "	98	462	217	80	223	89	46	80	70	12.3	2
STW-60S	1000	6000	1-1/2 "	113	492	217	95	223	89	55	90	80	15.6	1.4
STW-80S	1200	8000	1-1/2 "	120	502	217	95	223	89	55	90	80	18.7	1.2
STW-100S	2000	10000	1-1/2 "	128	516	217	110	223	89	67	118	90	21.4	1.1
STW-120S	3000	12000	1-1/2 "	128	516	217	110	223	89	67	118	90	21.4	1
STW-150S	4000	15000	1-1/2 "	138	542	217	110	223	89	67	118	90	25.5	0.8

****Standard kit contains: Torque wrench, reaction arm, retaining ring, Carrying case, Instruction manual etc.**