HYDRAULIC NUT SPLITTER



- Compact and ergonomic design, easy to use.
- Unique angled head design.
- Single-acting spring return cylinder.
- Matched with hand pump & hose.

Model	Nut Range (mm)	Capacity (ton)	Bolt Range	Weight (kg)
HNS1019	10-19	5	M6-M12	1.2
HNS1924	19-24	10	M12-M16	2
HNS2432	24-32	15	M16-M22	3
HNS3241	32-41	20	M22-M27	4.4
HNS4150	41-50	35	M27-M33	8.2
HNS5060	50-60	50	M33-M39	11.8
HNS6075	60-75	90	M39-M48	34.1






- Single-acting, spring return.
- Tri-blade technology provides three cutting surfaces on a single blade.
- Interchangeable heads provide maximum nut range flexibility.
- Preset scale allows controlled blade extension, which avoids damage to bolt threads.
- Grip tape and handle included for more secure movability.
- Nickel-plated cylinder body for excellent corrosion protection and improved durability in harsh environments.
- Internal Pressure Relief Valve for overload protection

Model	Nut Range (mm)	Capacity (ton)	Bolt Range	Weight (kg)
HNS7080	70-80	103	M45-m52	37
HNS7085	70-85	103	M45-M56	37
HNS7095	70-95	103	M45-M64	39
HNS70105	70-105	103	M45-M72	40
HNS110115	110-115	193	M76-M80	69
HNS110130	110-130	193	M76-M90	72



PNEUMATIC NUT SPLITTER PUMP

Brand	Torqueing Power Solutions (TPS)
Model	PNSP-700
Oil Tank capacity	6 Liters
Oil Flow	0.6L/min
Air Source	0.4-0.8Mpa
Working Pressure	700 bar
Weight	~19KG
Dimension	40*31*44cm

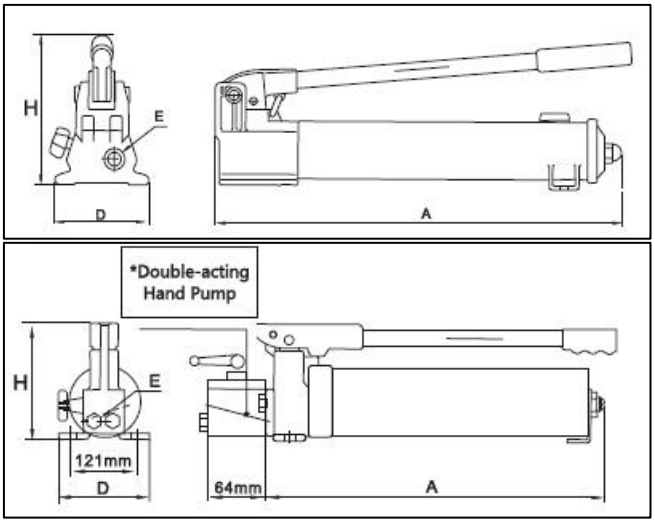

MANUAL NUT SPLITTER PUMP



Model	Usable Oil (cm3)	Pump Type	Pressure Rating (Bar)		Oil Capacity (cm3)		Dimensions (mm)			Oil Port Thread (NPT) E	Weight (kg)
			1st Stage	2nd Stage	1st Stage	2nd Stage	A	H	D		
T-142	350	Single Acting	13.8	700	7.0	1.0	310	127	137	3/8	2.2
T-392	901		13.0	700	11.26	2.47	533	157	120	3/8	4.0
T-80	2200		25.0	700	16.22	2.46	545	170	148	3/8	10.9
T-801	4080		25.0	700	16.22	2.46	659	174	146	3/8	14.1
T-462	7423		25.0	700	16.22	2.46	650	308	280	3/8	26.2
T-462XL	10000		25.0	700	16.22	2.46	650	308	280	3/8	35.8
T-84	2200	Double Acting	25.0	700	16.22	2.46	545	170	148	3/8	10.9
T-841	4080		25.0	700	16.22	2.46	675	174	146	3/8	14.9
T-464	7423		25.0	700	16.22	2.46	650	308	280	3/8	26.2
T-464XL	10000		25.0	700	16.22	2.46	650	308	280	3/8	36.8

Model	Description
HC-7210c	**Hydraulic Hose 3m with fitting**
HC-7220c	**Hydraulic Hose 6m with fitting**